

ergolastec sorb

THE OIL-ABSORBING MAT WITH PERMEABLE,
SLIP-RESISTANT FOOT PLATE AND EXCHANGEABLE
ABSORBER MATERIAL



ergolastec sorb

THE OIL-ABSORBING MAT WITH PERMEABLE, SLIP-RESISTANT FOOT PLATE AND EXCHANGEABLE ABSORBER MATERIAL



basic data	sorb_inlay
Upper surface	slip-resistant foot plate with absorber fleece
Bottom side	dämping hemisphere
Outer edge	20° bevelled
Lenght/width/thickness	1350 x 1000 x 19 mm*
Weight	27 kg (with foot plate and absorber fleece)
Hardness	63 ± 4 Shore A
Temperatur resistance	- 35°C to + 95°C
Interlocking designs	Typ A to K
Material	Rubber NBR-based
Colour	black
Tear resistance	min. 4,0 MPa
Elongation at break	> 200 %
Skid-resistance metal foot plate	R12/V12
Density	1,242 ± 0,2 g / cm ³
Fire protection certification	equivalent to Dfl
Oil resistance	resistant to mineralic oils and commercial cleaning agent at use according to the product instructions

*Tolerances according to DIN ISO 3302-1M4;

**Tested according to DIN 51130

- ERGOLASTEC sorb with permeable, slip-resistant foot plate and exchangeable absorber material
- Extra environment-friendly in use with critical oils, acids and water due to the changeable absorber-fleece
- Excellent skid-resistant by using custom-built metal foot-plate
- Bevelled outside edges for reduced risk of stumbling
- Cleaning of mat and floor facilitated by simple removal of mat
- Facile and uncomplicated change of used fleece
- This mat is due to the choice of high quality material comperatively odour less and therefore good applicable at indoor- areas
- Single mats can be laid without fixing

ergolastec sorb_inlay

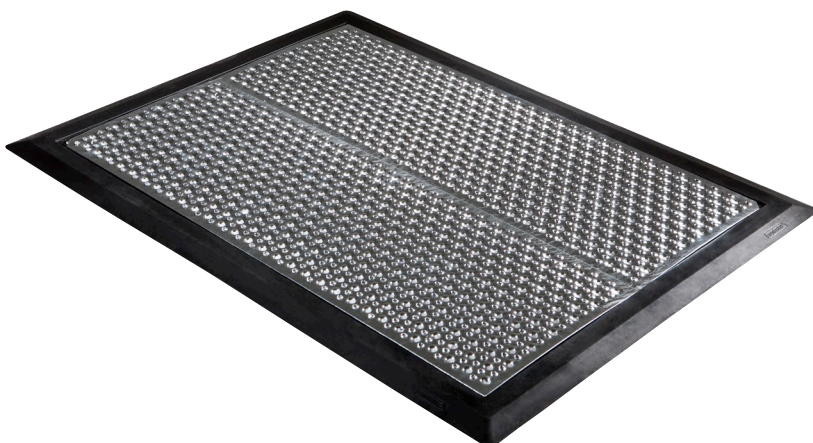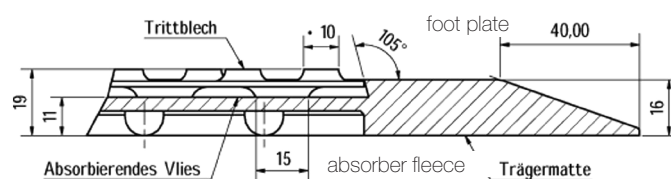

Mat with inlay for exchangeable absorber fleece
with metal foot plate