

ergolastec inlay

THE CHAMELEON AMONG THE MATS



ergolastec inlay

THE CHAMELEON AMONG THE MATS

basic data	inlay
Upper surface	display, duckboard, laminate, carpet, sorb
Bottom side	shock-absorbing bubbles
Outer edge	20° bevelled
Length/width/thickness	1350 x 1000 x 16 mm*
Weight	10 - 20 kg varied per inlay
Hardness	63 ± 4 Shore A
Temperatur resistance	- 35°C to + 95°C
Interlocking designs	Typ A to J
Material	EPDM and NBR
Colour	black, dusty grey
Tear resistance	> 4,0 MPa
Elongation at break	> 200 %
Rubber density	1,2 ± 0,2 g / cm ³
Detergent resistance	Resistant to commercial cleaning agent at use according to the product instructions


*Tolerances according to DIN ISO 3302-1M4

Further information for application and handling you will find in our manual under www.ergolastec.com/Download

ergolastec display



This mat with insert facility for posters or animated advertisements is particularly suitable for trade fairs and showrooms. Or an ideal way of displaying quality guidelines at the production line.

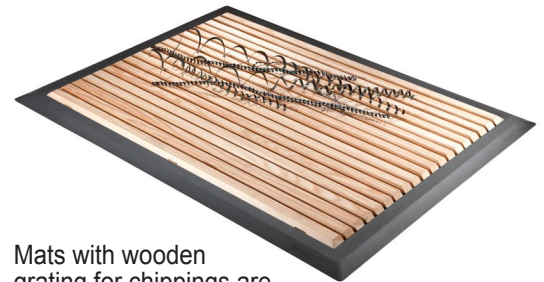


Mats with wooden grating for chippings are the ergonomic alternative to the standard wooden slats in the wood-working industry.



The laminate insert is particularly easy to clean, making it ideal for use in the wood-working industry, the retail trade or in boutiques, for example.



The carpet insert is impressive in terms of comfort, flexibility and versatility. Also suitable for use as an entrance mat.

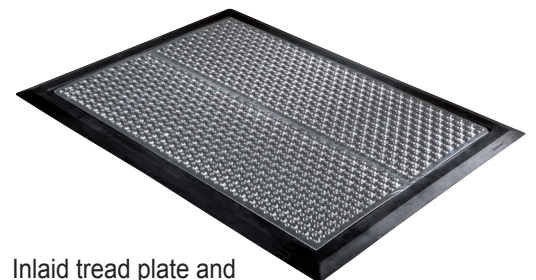

Inlaid tread plate and absorbent material for safe footing and optimum absorption of liquid spillages.